

Power units with large displacement



Technical data

Max. operating pressure Tank volume 9 I Oil port G 3/8 Hydraulic fluid Hydraulic oil HLP 46 to DIN 51524 Motor voltage 380-420 V/50 Hz/3~ Motor rating 2,2 kW	Max. flow	4,2 l/min.
Tank volume 9 I Oil port G 3/8 Hydraulic fluid Hydraulic oil HLP 46 to DIN 51524 Motor voltage 380-420 V/50 Hz/3~ Motor rating 2,2 kW Type of valve Seat valves, leak proof, max. 500 bar Solenoid voltage 24 VDC Protection IP 54 Dimensions (LxBxH) approx. 400 x 400 x 600 mm	May appreting program	·
Oil port G 3/8 Hydraulic fluid Hydraulic oil HLP 46 to DIN 51524 Motor voltage 380-420 V/50 Hz/3~ Motor rating 2,2 kW Type of valve Seat valves, leak proof, max. 500 bar Solenoid voltage 24 VDC Protection IP 54 Dimensions (LxBxH) approx. 400 x 400 x 600 mm	wax. operating pressure	400 bar
Hydraulic fluid Hydraulic oil HLP 46 to DIN 51524 Motor voltage 380-420 V/50 Hz/3~ Motor rating 2,2 kW Type of valve Seat valves, leak proof, max. 500 bar Solenoid voltage 24 VDC Protection IP 54 Dimensions (LxBxH) approx. 400 x 400 x 600 mm	Tank volume	91
Motor voltage 380-420 V/50 Hz/3~ Motor rating 2,2 kW Type of valve Seat valves, leak proof, max. 500 bar Solenoid voltage 24 VDC Protection IP 54 Dimensions (LxBxH) approx. 400 x 400 x 600 mm	Oil port	G 3/8
Motor rating 2,2 kW Type of valve Seat valves, leak proof, max. 500 bar Solenoid voltage 24 VDC Protection IP 54 Dimensions (LxBxH) approx. 400 x 400 x 600 mm	Hydraulic fluid	Hydraulic oil HLP 46 to DIN 51524
Type of valve Seat valves, leak proof, max. 500 bar Solenoid voltage 24 VDC Protection IP 54 Dimensions (LxBxH) approx. 400 x 400 x 600 mm	Motor voltage	380-420 V/50 Hz/3~
Solenoid voltage 24 VDC Protection IP 54 Dimensions (LxBxH) approx. 400 x 400 x 600 mm	Motor rating	2,2 kW
Protection IP 54 Dimensions (LxBxH) approx. 400 x 400 x 600 mm	Type of valve	Seat valves, leak proof, max. 500 bar
Dimensions (LxBxH) approx. 400 x 600 mm	Solenoid voltage	24 VDC
` '	Protection	IP 54
and valve design	Dimensions (LxBxH)	depending on displacement
Weight approx. 40 - 60 kg depending on design	Weight	



Frame-type power unit for 3 forging presses: 12 clamping circuits with pressure reduction for temperature compensation

high pressure 4.2 l/min., 400 bar cooling return flow: 45 l/min., 10 bar

Technical data

Max. flow	45 l/min.
Max. operating pressure	400 bar
Other technical data will of the project	be made available during the course

Planning and installation of complete oil-hydraulic systems including complex electrical controls, designed to suit Hilma-Römheld clamping elements used by our customers.

Suitable for all clamping elements used on presses, especially on power and forging presses.


Our large range of power units and clamping elements for presses enables us to meet your specific requirements.






Power Units Accessories and Service

Valve packages fastened to the press ram or the press bed

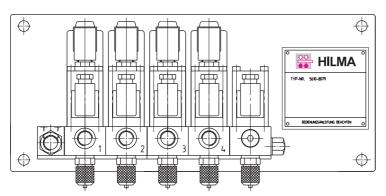



4-circuit valve packages with pump pressure switch

Technical data

Max. flow	8 l/min
Oil port	G 3/8
Hydraulic fluid	Hydraulic oil HLP 46 to DIN 51524
Type of valve	Seat valves, leak proof, max. 500 bar
Solenoid voltage	24 V DC

Other versions are available upon request

The service we offer you

In addition to the cost effectiveness of our products, our customers also benefit from our efficient service.

Our service includes

- preparation and installation of hydraulic systems to suit specific applications
- manufacture, installation and commissioning of complete hydraulic systems
- repair and maintenance of hydraulic cylinders, clamping elements and power units supplied
- trouble-shooting and repair on the customer's premises
- constant repair service and fast response on our premises

All over the world our service is ready to act and to guarantee immediate help.

Specially trained, experienced staff make sure that problems are solved rapidly and proficiently.

You can rely on it!

